

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H04N 7/173, 7/20</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 97/35432</b></p> <p>(43) International Publication Date: 25 September 1997 (25.09.97)</p>
<p>(21) International Application Number: <b>PCT/CA97/00178</b></p> <p>(22) International Filing Date: <b>14 March 1997 (14.03.97)</b></p> <p>(30) Priority Data: 60/013,662      19 March 1996 (19.03.96)      US</p> <p>(71) Applicant (for all designated States except US): <b>VISTAR TELECOMMUNICATIONS INC. [CA/CA]; Suite 1410, 427 Laurier Avenue W., Ottawa, Ontario K1G 3J4 (CA).</b></p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): <b>ZULIANI, Michael [CA/CA]; 4786 Massey Lane, Ottawa, Ontario K1J 8W9 (CA). HAUGLI, Hans-Christian [NO/CA]; 388 Mariposa Avenue, Rockcliffe Park, Ottawa, Ontario K1M 0S9 (CA).</b></p> <p>(74) Agent: <b>MITCHELL, Richard, J.; Marks &amp; Clerk, P.O. Box 957, Station B, Ottawa, Ontario K1P 5S7 (CA).</b></p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report.</p>

(54) Title: INTERACTIVE SATELLITE BROADCAST SYSTEM

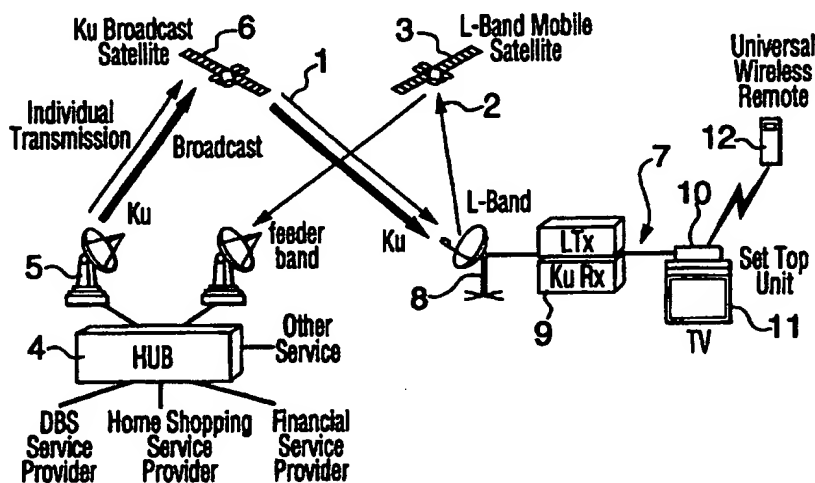

## (57) Abstract

In a method of providing an interactive broadcast service, broadcast signals are transmitted via a wideband satellite link to end users. Return signals are received from the users transmitted over a narrowband satellite link separate from the first link. The return signals allow users of the service to send commands back to the base station to request specific services.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

**INTERACTIVE SATELLITE BROADCAST SYSTEM**

This invention relates generally to a satellite communications system providing interactive services to end users.

Direct Broadcast Satellite DBS systems, where service providers broadcast direct to small receiving dishes in the home, are well known. Initially, these were one-way services allowing purely passive reception. More recently, telephone operating companies have started providing a return line through a terrestrial line to accommodate a user return capability for services such as pay per view TV, home shopping, home banking and similar other services; HUGHES DirectTV presently uses a POTS line as a return to carry information relating to the billing of services provided. This solution requires the use of the switched telephone network and is inefficient, especially when it is used to carry small amounts of data such as ordering information and the like.

Some DBS services offer access to the Internet with the downstream data being provided via satellite on a wideband channel and the return path being via a narrow band terrestrial link, usually a conventional POTS telephone line. This arrangement requires a switched telephone circuit and ties up the public switched network even though relatively small amounts of data are transmitted on the return link on an occasional basis.

An object of the invention is to provide an improved interactive direct broadcast system.

According to one aspect of the present invention there is provided an interactive direct broadcast station comprising means for transmitting broadcast signals via satellite to an end user over a wideband satellite link, means for receiving return signals from end users over a separate narrow band satellite return link providing a return path, and means for interpreting said return signals to respond to requests from the end user.

The broadcast signals can be conventional broadcast video signals or multimedia signals from the comprising text, graphics, sound and video. The Internet is an example of a source of multimedia signals.

- 2 -

A wideband link is of the type suitable for broadcast purposes, such as the Ku-band allocated for satellite service. A narrowband link is of the type more usually associated with mobile communications, such as the L-band.

The forward broadcast signals are preferably carried in the Ku band, with the return command signals being carried in the L-band, which is typically used for mobile communications. The invention thus combines two, different one-way satellite transmissions using two different satellites. In a preferred embodiment, this invention uses an L-band satellite proximate to the Ku band broadcast satellite to provide a low cost return path from an individual subscriber. It is estimated that up to a million transactions per hour on the L-band satellite can be provided with each 300 kHz circuit. Currently set top boxes on the user premises have a one way path from a satellite dish that allows a receive only function.

This invention thus provides an inexpensive narrow band transmitter to the system which provides a low cost return. It is estimated that the cost of a single transaction is a small fraction of the cost of a transaction using POTS.

The associated cost using an L-band satellite for low rate data transmission is less than the cost of using Ku-band satellites for high speed return data transmission; L-band transmitters can be at low cost incorporating a low signal level with an antenna having low gain; L-band systems are coordinated to cope with low level wide beam broadcast signals, thus adjacent satellite interference problems can be overcome.

In a preferred embodiment of this invention CDMA (Code division Multiple Access) is used to ensure a lowest possible RF transmit level for a quantity of information that is transmitted on the return link, thereby providing return capacity at low cost. The invention provides a new combination of the receiver and transmitter with CDMA L-band operating simultaneously in conjunction with a broadcast signal in the Ku band. A specific and preferred embodiment of this invention relates to its applicability to existing home satellite dishes that can be adapted at a low cost to conform with the teachings of this invention.

The system includes a narrow beam accurately directed Ku-band antenna (currently present in DBS systems), and in accordance with this invention a second low

- 3 -

gain wide-beam L-band antenna. The L-band antenna may be independent of the narrow beam antenna, or it may be incorporated with the DBS antenna, using the dish or a reflector. The latter embodiment produces a very wide beam at L-band because the reflector is small in terms of L-band wavelengths.

which preferably can be mounted in conjunction with the narrow beam antenna, preferably on the same dish, for example, near its periphery because the L-band antenna does not make use of the focussing characteristics of the dish and does not have to be pointed accurately.

Alternatively, the L-band antenna may be independent of the Ku-band antenna. It may be mounted on the periphery of the Ku-band dish or alternatively, remote from it in the form of a microstrip patch or short helix of several turns providing suitable, relatively low gain for this application.

This invention combines the advantages of satellite mobile communications in the L-band with the advantages of the broadcasting capabilities of the Ku band. The system provides a high data rate broadcast signal out (on the Ku band) and a low data rate return signal (on the L-Band). Furthermore, this can be achieved with existing satellites.

Another novel and inventive aspect of this invention lies in the arrangement of components disposed between a set top-box and the antenna units. Essentially these components comprise a CDMA module providing modulation of the L-band return signal. This module further includes a Tx unit for the L-band.

According to another aspect of the invention there is provided a home direct broadcast receiving system, comprising a receiver for receiving wideband broadcast signals from a hub station via satellite on a wideband link, means for generating return signals for making specific requests to said hub station, and a transmitter for transmitting said return signals via satellite back to said base station over a separate narrowband link.

According to a still further aspect of the invention there is provided a method of providing an interactive broadcast service comprising the steps of transmitting broadcast signals via a wideband satellite link to end users, receiving return signals from said users

- 4 -

transmitted over a separate narrowband satellite link, and responding to said return signals to provide services requested by said users.

The invention thus provides a communications system that comprises two different satellites each configured to operate to form a single communications system wherein each satellite is in one-way communications but together, provide two way communications. More specifically, an aspect of the invention relates to terminal equipment on the user premises, comprising a small low cost transmitter in a return link in the system.

The invention will now be described in more detail, by way of example, only with reference to the accompanying drawings, in which:-

Figure 1 is general diagram of an interactive satellite broadcast system in accordance with the invention;

Figure 2 is a block diagram of a hub station in accordance with the invention;

Figure 3 is a block diagram of a DTH/DBS terminal enhanced with a narrowband return link; and

Figure 4 is a block diagram showing the necessary additions to the set-top controller software.

The system in accordance with this invention is illustrated in Figure 1. The system makes combined use of two satellite systems both operating in a one-way mode. The forward link 1 is a direct broadcasting/direct-to-home satellite system, inherently a one-way system, broadcasting to several million users. The bulk of broadcast services comprise entertainment video services, which include pay-per view and impulse pay-per-view television. Both of the latter may make use of a very low capacity return link 2 to order particular services or to convey the information that particular services were used. A wide variety of infotainment services which also require a low capacity return link may also be provided. Examples are home shopping, financial services, video auctions, horse race betting, video casinos, travel arrangements, opinion polling, game shows etc.

- 5 -

The return link 2 is provided through the one-way use of an L-band, geostationary orbit, mobile satellite system 3. Since only a very low capacity is required in the return link, the transmitter uses Code Division Multiple access technology, which results in a low cost and is ideally suited to this application because most transactions on the return path involve bursts of relatively small amounts of data. From 100 to 200 bits are sufficient for most transactions, and transmission rate is nominally in the range of 1200 to 4800 bps. The L-band link is designed to permit typically 400 messages per second per circuit.

In Figure 1, the hub 4 has feeds from various services, such as from a DBS service provider, home shopping service provider, and financial service provider and broadcasts these from conventional satellite broadcast transmitter 5 via a channel on the Ku band satellite 6 to home users, such as 7. Each home user includes a Ku band receiving antenna 8, a combined L-band TX/Ku-band RX unit 9, and a set-top unit 10 connected to a television 11. The set-top unit 10 may be controlled by a wireless remote control unit 12 in a conventional manner.

In operation, a typical user 7 can select a broadcast channel using his remote unit 12 in a conventional manner. In addition, the user can request specific services, for example, pay-per-view movies by entering appropriate codes into the remote unit 11. These are then transmitted on the L-band link back to the hub 4 using CDMA techniques. The hub 11 can then respond by, for example, enabling the users address on the broadcast channel so as to grant access to a requested movie. The return link can also be used to transmit ordering information for home shopping services, or instructions to the financial services provider to carry out certain transactions. The primary characteristic of the data on the return link 2 is that it very low bandwidth compared to the broadcast signals since it in essence consists of commands from the user related to the broadcast signals.

Congestion control techniques can be implemented to provide the availability required by the individual application, typically 99.9%, but higher if required. The cost of the L-band transmit unit should be US\$100 or less.

Referring now to Figure 2, the primary elements embodied in the uplink and downlink hub earth stations are shown, including the principal interfaces.



- 6 -

Existing DTH/DBS uplink 20 and mobile satellite feederlink earth stations 30 are used, with the addition of a number of elements to facilitate the low cost satellite return link system.

The uplink unit 20 comprises a archived video server 21 for storing movies and the like, and a real-time coder 22 receiving signals from a DTH/DBS service provider and coding them so as to allow reception only by authorized users. The output of the coder 21 along with the output of the video server 21 is fed to multiplex and formatting unit 23, which formats the signals for broadcast over the Ku-band satellite link 1 from antenna 27 after passing through forward error correcting unit 24, modem 25, and Ku-band Tx unit 26.

The return signals in the L-band are received by the mobile satellite feeder link receiving antenna 31 and passed through feeder unit 32 to CDMA demodulator 41 in interface unit 40. After CDMA demodulation , the signals are passed through forward error correction unit 42 to recover errors and from there to application interface processor 43.

The application interface processor 43 receives these signals and either passes them through to the return network controller 44, which interfaces with the network control system 45 in the uplink unit 20 or else passes them to the appropriate third party providers, such as financial services providers and the like.

The signals from the FEC unit 42 are also fed to the network Performance Monitoring Processor 45, which feeds the Return Network Controller 44. This controls the return terminal transmission using a suitable congestion control strategy to ensure that signal loss does not exceed the availability specification.

The DTH/DBS 50 receiver is shown in Figure 3. The set-top unit 50 deals with both applications related data being transmitted and network control data generated by the Return Network Controller 44 at the hub station. Typical set-top units are the Star Trak 1000, DSS model 4430, and Power Vu Model D9223 digital satellite receivers manufactured respectively by Tee-Comm, RCA, and Scientific Atlanta.

- 7 -

Ku-band antenna 51 feeds signals to low noise receiver 52, which forwards them in turn to demodulator 53, FEC decoder 54, MPEG demultiplexor 55, and decrypter 56, which passes only signals authorized for the user. From the decrypter 56, the signals are passed to the MPEG video decoder 57, the MPEG audio decoder 58, and data interface unit 59. Units 57 to 59 are connect to PAL or NTSC encoder 60, for connection to a television, and a PC to provide, for example, wideband downstream access to the Internet.

The set top unit 50 is controlled by wireless remote 61 communicating with a wireless interface unit 62 connected to set top controller 63. The block 50 as described so far is conventional. However, the set-top controller 63 is modified to incorporate software to deal with applications using the return link capability described herein. Specifically the additional software formats and generates the return link signal passed to forward error correcting encoder 71.

In accordance with this embodiment of the invention, the set top controller 63 is also connected to a forward error correcting encoder 71, a CDMA modulator 72, and an L-band transmit unit 73. This in turn feeds an L-band antenna 74, which is in close proximity to the Ku-band antenna 51, for onward transmission to the separate L-band satellite, which is generally close to the Ku-band antenna.

Downstream signals are received in a conventional manner. Applications data is encoded and modulated for transmission upstream by the low power L-band transmitter 73 via the mobile satellite used. Actual transmission timing is under control of the congestion control strategy being exercised for the particular application being served. The L-band transmit antenna is preferably physically integrated with the DTH/DBS receive antenna, but may also be an independent stand-alone antenna, depending on the proximity of the DTH/DBS and mobile satellites in use.

Figure 4 shows the set-top controller in more detail. This consists of a program data store 100, a select program guide unit 101 (with IR remote control), a display program guide GUI (Graphical User Interface) 102, A unit 103 for permitting interaction between the GUI and the IR remote unit, and a unit 104 for displaying the selected channel on the TV screen. These components are found in a conventional set-top unit. In addition, the modified controller employed in the invention includes an interactive data

- 8 -

store 110, a unit 111 for permitting the user to select the interactive mode with the IR remote control, a unit 112 for displaying a GUI for the selected application, a unit 113 for permitting interaction between the GUI 112 and the IR remote 61, and a message formatter 144. This formats messages on the send command from the IR remote unit 61, which are then forwarded to the L-band transmitter by the unit 115.

A typical example of the invention might be a home shopping service, which would be used by an enrolled and registered user who has already supplied mailing and courier delivery addresses, credit card numbers, etc. to the home shopping network. To make use of the interactive return capability, the home shopping broadcast signal will include an order screen that is displayed to the user's TV on command from the remote control. Continuing to use the remote control, the user can navigate through the order screen, filling in ordering information pertinent to the item to be purchases. Such as quantity, color, size, etc. When complete, the user can send information to the home shopping service office as a "purchasing information request" using a "send message" button on the remote control. The home shopping service will immediately send an addressed message back to the user containing price, availability, delivery information, etc. as well as "yes, I wish to purchase", "payment method", "order change", or "cancellation", etc. selection boxes on the screen. After selection of the appropriate boxes, the user can again use the "send message" button on the remote control. The home shopping service would then send a confirmation message to the user.

The user terminal addressing capability is already part of the DTH/DBS systems in place. The capability to decode and display screens related to interactive applications requires modification of the set top controller software in the set top unit 50. A modified wireless remote control 61 is also required with additional function buttons related to the interactive mode, such as "display interactive screen" and "send message". Remote control functions such as menu scrolling and menu item selection are normally available on typical wireless remote controllers supplied with DBS set top boxes, but the set-top controller 63 also requires modification to deal with the interactive-related TV display screens, message formatting, and send command functions. Formatted messages pertinent to the specific application are then processed by the L-band transmitter 70 and sent via the

- 9 -

L-band satellite to the home shopping service office (in this case). Set top controller software additions and remote control unit modifications to standard units used with available DTH/DBS services accommodate a wide variety of applications of interest to users.

The present invention provides an optimal solution to the problem of providing a return path in typical consumer applications, where the amount of data transmitted on the return path is small relative to the amount of data to be received on the forward path.

- 10 -

### Claims

1. An interactive direct broadcast station comprising means for transmitting broadcast signals via satellite to an end user over a wideband satellite link, means for receiving return signals from end users over a separate narrow band satellite return link providing a return path, and means for interpreting said return signals to respond to requests from the end user.
2. An interactive direct broadcast station as claimed in claim 1, further comprising a CDMA demodulator for demodulating CDMA modulated signals received on the return link.
3. An interactive direct broadcast station as claimed in claim 1 or 2, further comprising a source of broadcast material, and an interface unit receiving said return signals and operative to control said source in response thereto to select broadcast material to be transmitted to the end user.
4. An interactive direct broadcast station as claimed in any one of claims 1 to 3, wherein said interface unit includes ports for establishing communication with different service providers providing signals for broadcast over the wideband link.
5. An interactive direct broadcast station as claimed in any one of claims 1 to 4, wherein said wideband link is Ku band and said narrowband link is L-band.
6. A direct-to-home broadcast receiving system, comprising a receiver for receiving wideband broadcast signals from a hub station via satellite on a wideband satellite link, means for generating return signals for transmission to said hub station, and a transmitter for transmitting said return signals via satellite back to hub base station over a second narrowband link separate from said first link.
7. A direct-to-home broadcast receiving system as claimed in claim 6, further comprising a CDMA modulator for CDMA modulating said return signals prior to transmission on the return link.
8. A direct-to-home broadcast receiving system as claimed in claim 6 or 7, further comprising a narrow beam antenna for receiving said broadcast signals and a wide beam

- 11 -

antenna for transmitting said narrowband signals, said wide beam and narrow beam antenna being mounted in close proximity.

9. A direct-to-home broadcast receiving system as claimed in claim 8, further wherein said antenna are mounted on a common dish.

10. A direct-to-home broadcast receiving system as claimed in any of claims 6 to 9, wherein said transmitter is connected to said a controller receiving commands from a user for transmission back to the base station.

11. A direct-to-home broadcast receiving system as claimed in claim 10, wherein said controller is connected the transmitter by a CDMA modulator, which CDMA modulates the return signals for transmission over the narrow band link.

12. A method of providing an interactive broadcast service comprising the steps of transmitting broadcast signals via a wideband satellite link to end users, receiving return signals from said users transmitted over a narrowband satellite link separate from said first link, and responding to said return signals to provide services requested by said users of the service.

13. A method as claimed in claim 12 wherein said return signals are CDMA modulated.

14. A method as claimed in claim 12 wherein said broadcast signals are transmitted in the Ku band and the return signals are transmitted in the L band.

15. A method as claimed in any one of claims 12 to 14 wherein said return signals are operative to select specific broadcast material desired by an end user.

16. A method as claimed in any one of claims 12 to 14 wherein said return signals are operative control the downloading of multimedia information from the Internet or other sources to an end user.

17. An interactive direct broadcast satellite system comprising means for receiving a first Ku-band signal from a Ku broadcast satellite; means for decoding said Ku-band signal received from said Ku broadcast satellite; means for providing an encoded return signal; CDMA modulation means for modulating said encoded return signal to provide an

- 12 -

encoded CDMA modulated signal, and means for transmitting said modulated encoded return signal to an L-band satellite.

18. A direct broadcast satellite system as defined in claim 17, wherein the Ku broadcast satellite and the L-band satellite hubs are interconnected.


19. A direct broadcast satellite system as defined in claim 17 further comprising a set top unit for receiving the decoded Ku-band signal received from said Ku broadcast satellite, and for providing a return signal to be encoded by said means for providing an encoded return signal.

20. A direct broadcast satellite system as defined in claim 19, wherein said means for receiving a first Ku-band signal, and said means for transmitting the modulated encoded return signal comprise a single transmitting and receiving antenna.

21. A direct broadcast satellite system as defined in claim 19, wherein said means for transmitting the modulated encoded return signal is mounted and combined with an existing Ku-band receiving antenna.

22. A modulating and demodulating transmitting and receiving unit for connection between a set top unit and an antenna, comprising: means to receive and encode information from the set top unit destined for said antenna means; and means to receive and decode information from said antenna means destined for said set top unit.

1/4

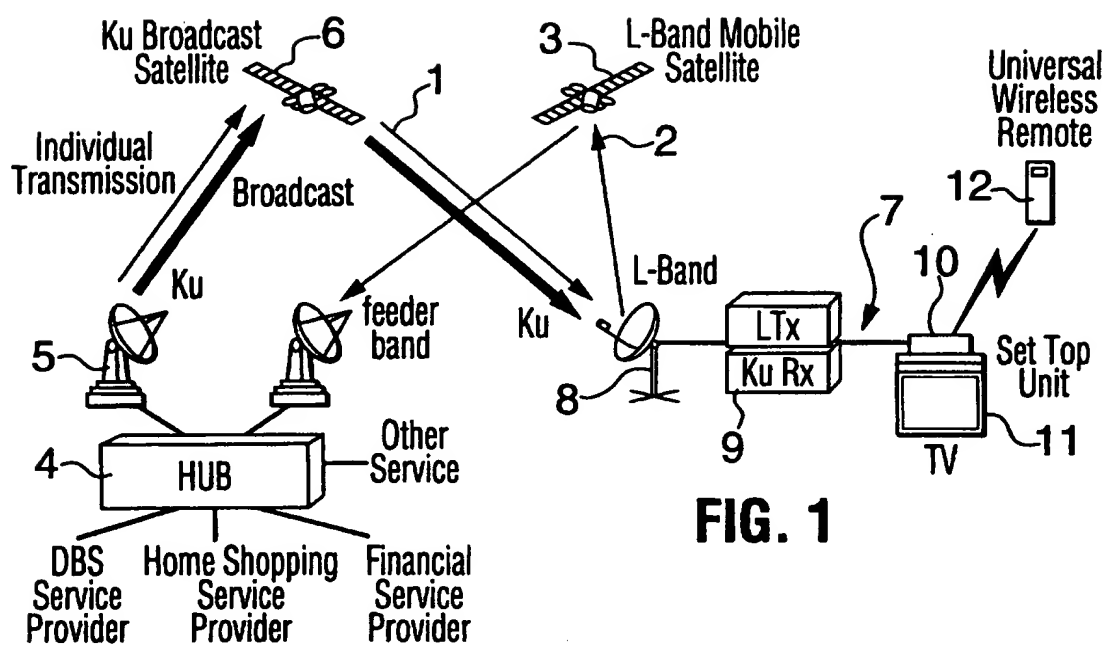**FIG. 1**



2/4

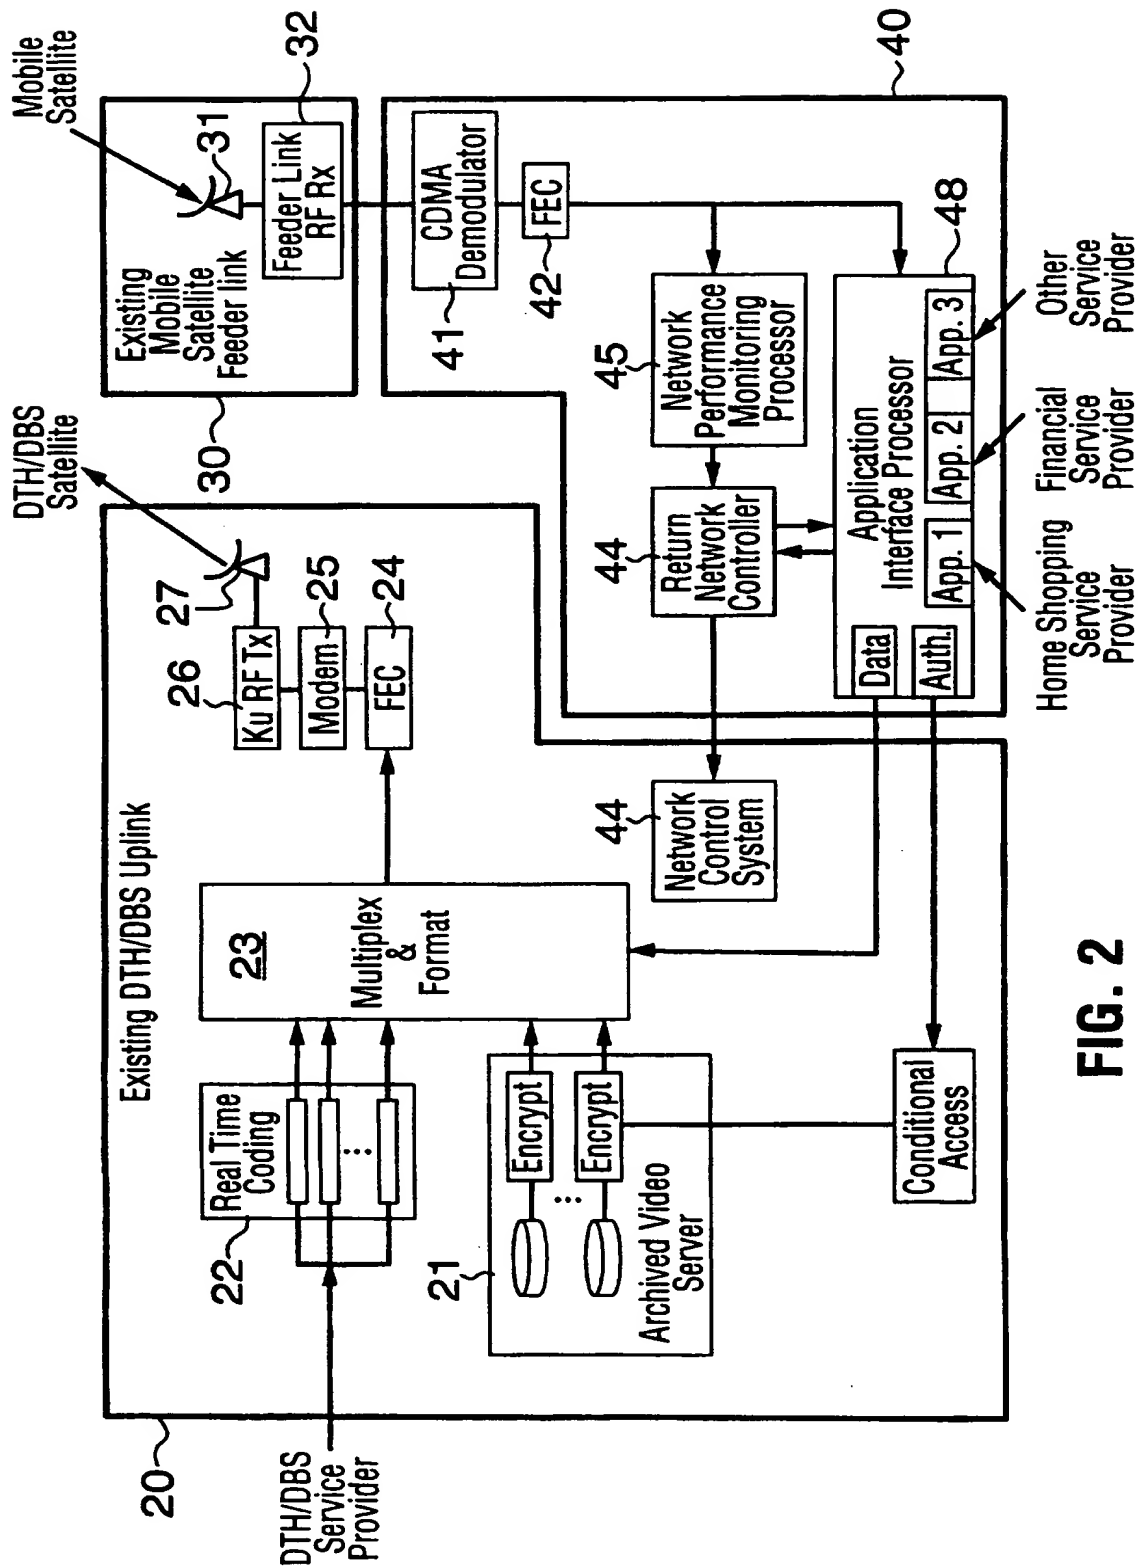
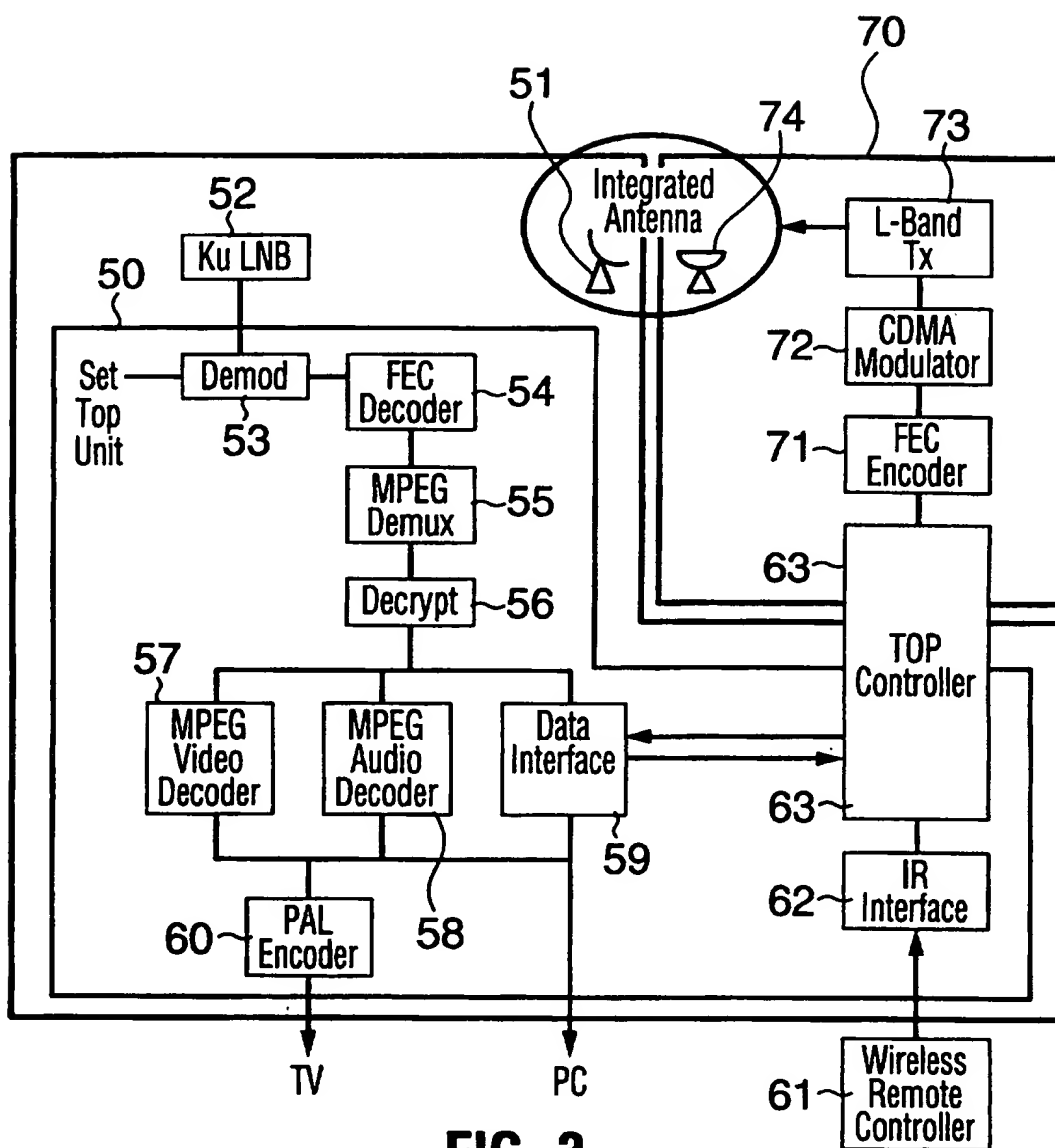
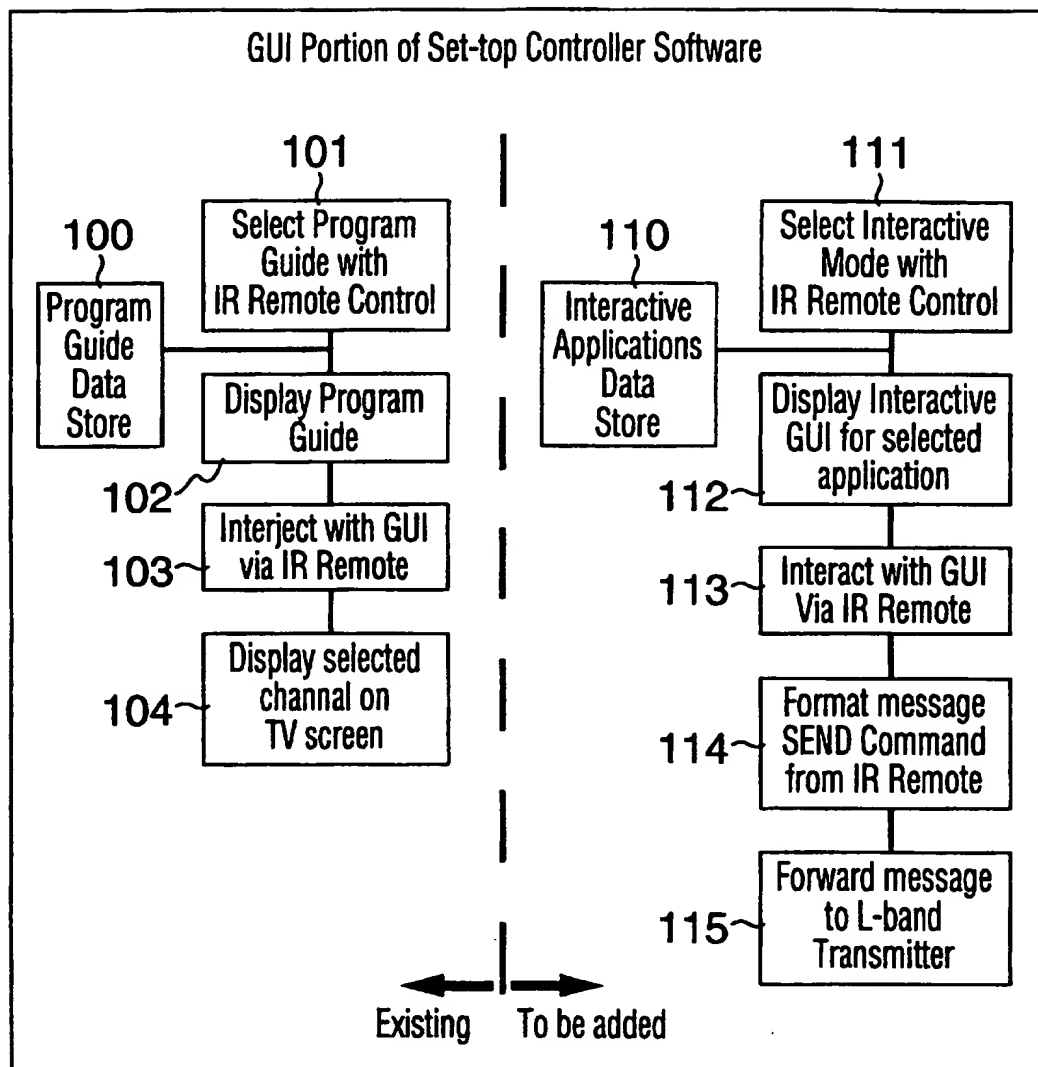


FIG. 2

3/4

**FIG. 3**

4/4

**FIG. 4**

# INTERNATIONAL SEARCH REPORT

National Application No  
PCT/CA 97/00178

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04N7/173 H04N7/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 94 24783 A (CONIFER CORP) 27 October 1994  see page 2, line 10 - line 30 see page 3, line 23 - page 4, line 17 see page 8, line 3 - page 11, line 33 see figures 1-4  ---	1,3,4,6, 8-10,12, 14,16,22
A	NTT REVIEW, vol. 2, no. 1, 1 January 1990, TOKYO, JP, pages 44-52, XP000113561 KUNIHIRO HAYASHI ET AL: "14/12-GHZ-BAND SATELLITE COMMUNICATION SERVICES" see page 49, right-hand column, line 4 - page 52, right-hand column, line 13 see table 3 see figures 9-11  -----	1,3,5,9, 10,12,22



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "A" document member of the same patent family

Date of the actual completion of the international search

9 June 1997

Date of mailing of the international search report

26.06.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Van der Zaal, R

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/CA 97/00178

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9424783 A	27-10-94	US 5437052 A	25-07-95
		AU 6631594 A	08-11-94
		US 5394559 A	28-02-95
-----			